


Extra Heavy Duty Steel Lintel CN99/394C



Wall Construction	EXTERNAL SOLID WALL
Inner Leaf	N/A
Outer Leaf	200-215
Cavity	N/A
Loading Details	EXTRA HEAVY

Specification

Product Code	Standard Length (mm)	SWL (kN)	Weight (kg)	Nominal Height (mm)
CN99/394C3000	3000	54	64.68	295
CN99/394C3300	3300	54	71.15	295
CN99/394C3600	3600	51	77.62	295
CN99/394C3900	3900	51	84.05	295
CN99/394C4200	4200	49	93.19	295
CN99/394C4575	4575	49	98.64	295
CN99/394C4800	4800	49	106.50	295

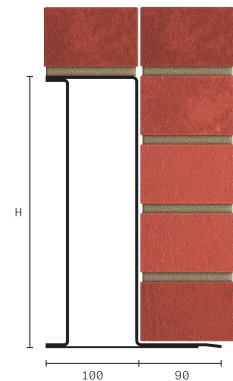

All ratios are shown inner to outer

- The SWL (safe working load) is based on the total UDL (uniform distributed load) over maximum span using 150mm end bearings.
- Standard lengths are available in increments of 300mm at lengths 3000mm to 4800mm (including 4575mm, but excluding 4500mm).

Note: Whilst the above information is intended to offer general guidance regarding typical applications, it should not be considered as comprehensive. Requirements not fully covered by the above should be referred to our technical services department for individual consideration.